




1/12

FIG. 1



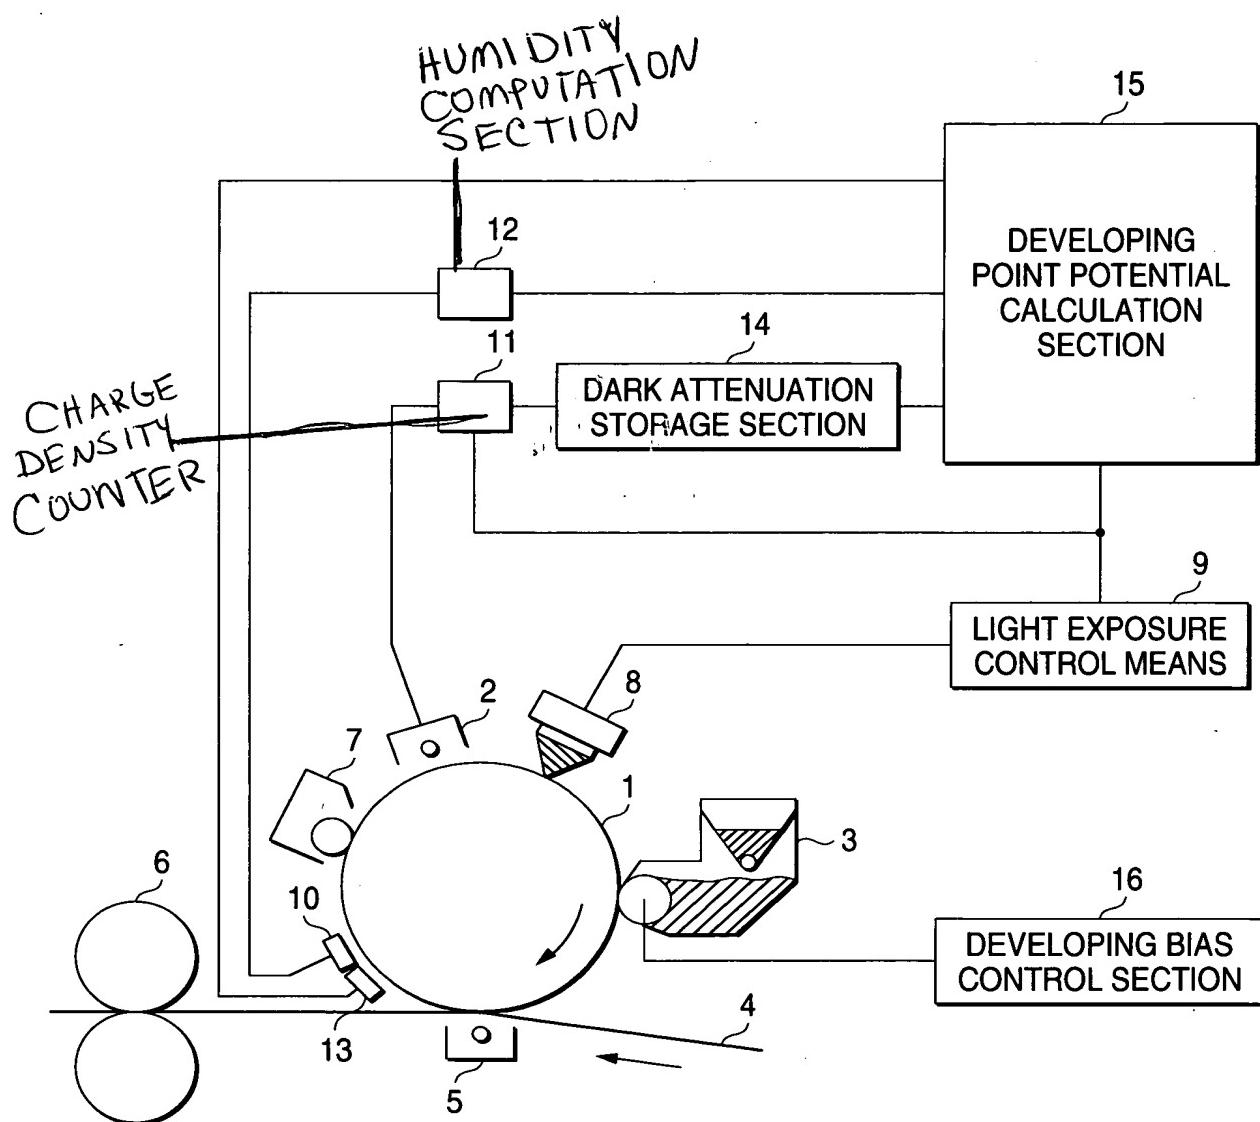

4/12

FIG. 5


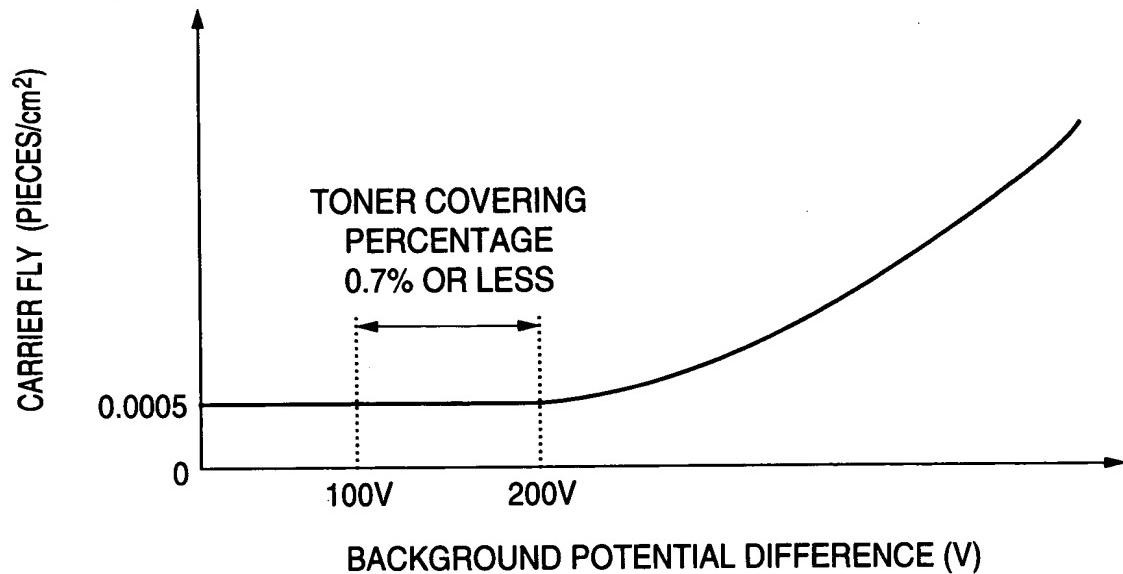


FIG. 6



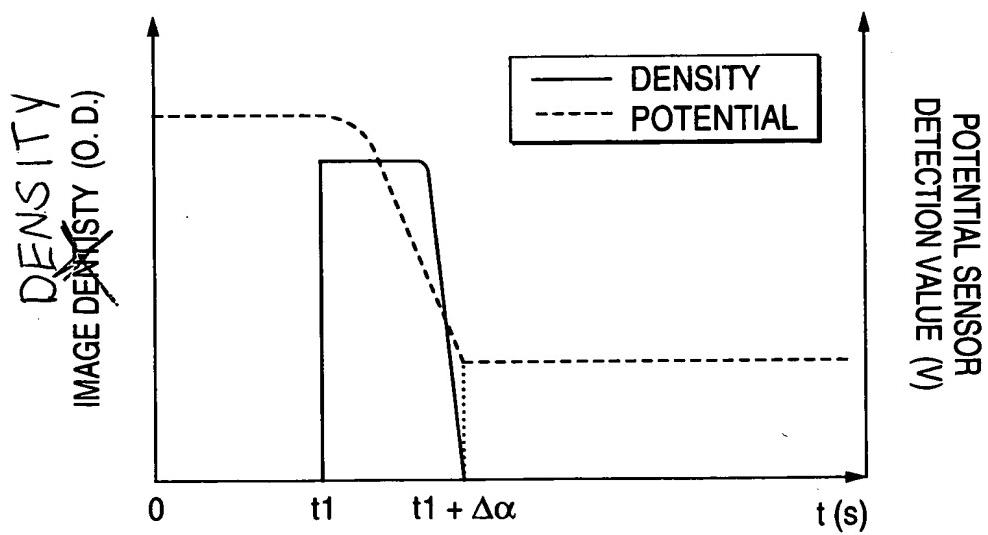

6/12

FIG. 9


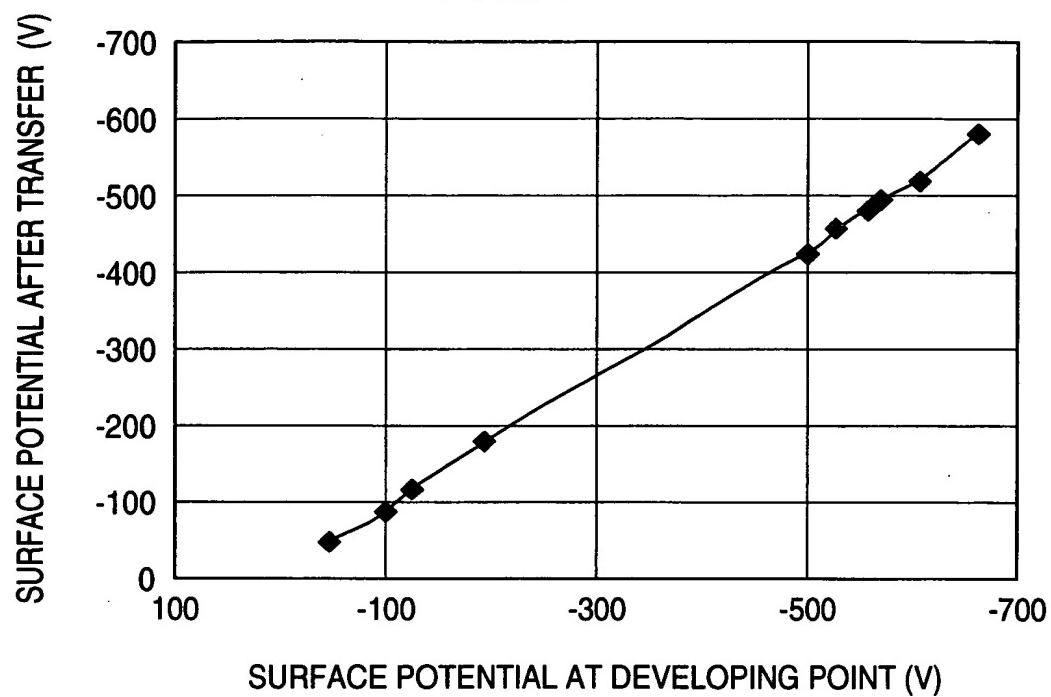


FIG. 10



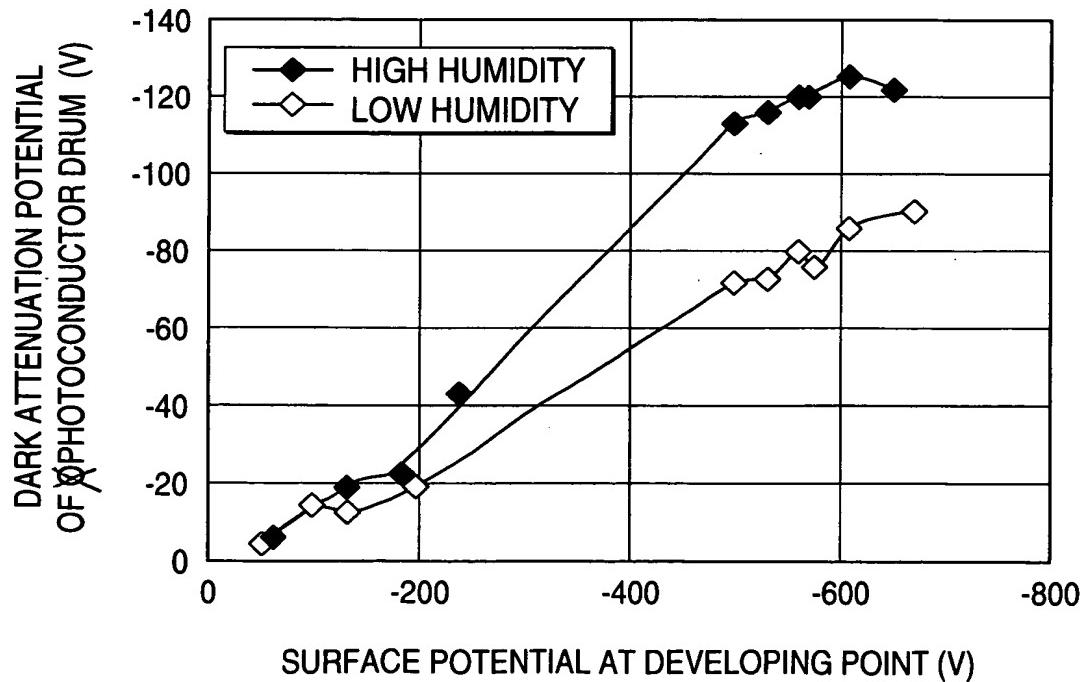

7/12

FIG. 11

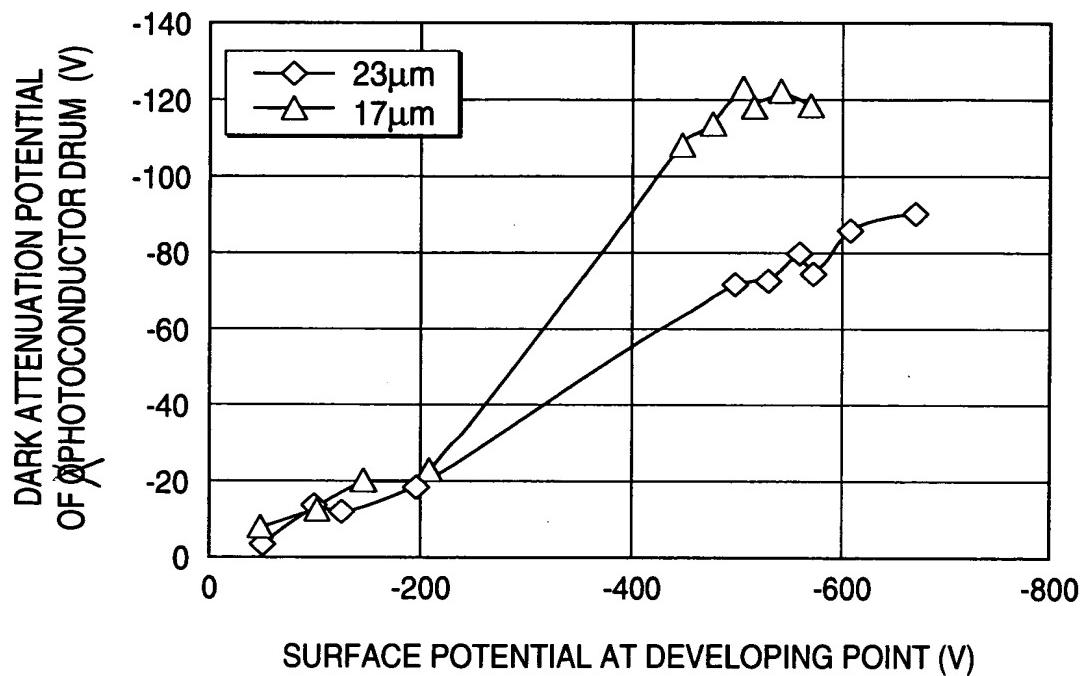



FIG. 12

CHARGE DENSITY	HUMIDITY		
	< 20%RH	< 65%RH	< 100%RH
< 0.03μC/cm <sup>2</sup>	40V	60V	80V
< 0.04μC/cm <sup>2</sup>	70V	90V	110V
< 0.05μC/cm <sup>2</sup>	100V	120V	140V



8/12

FIG. 13

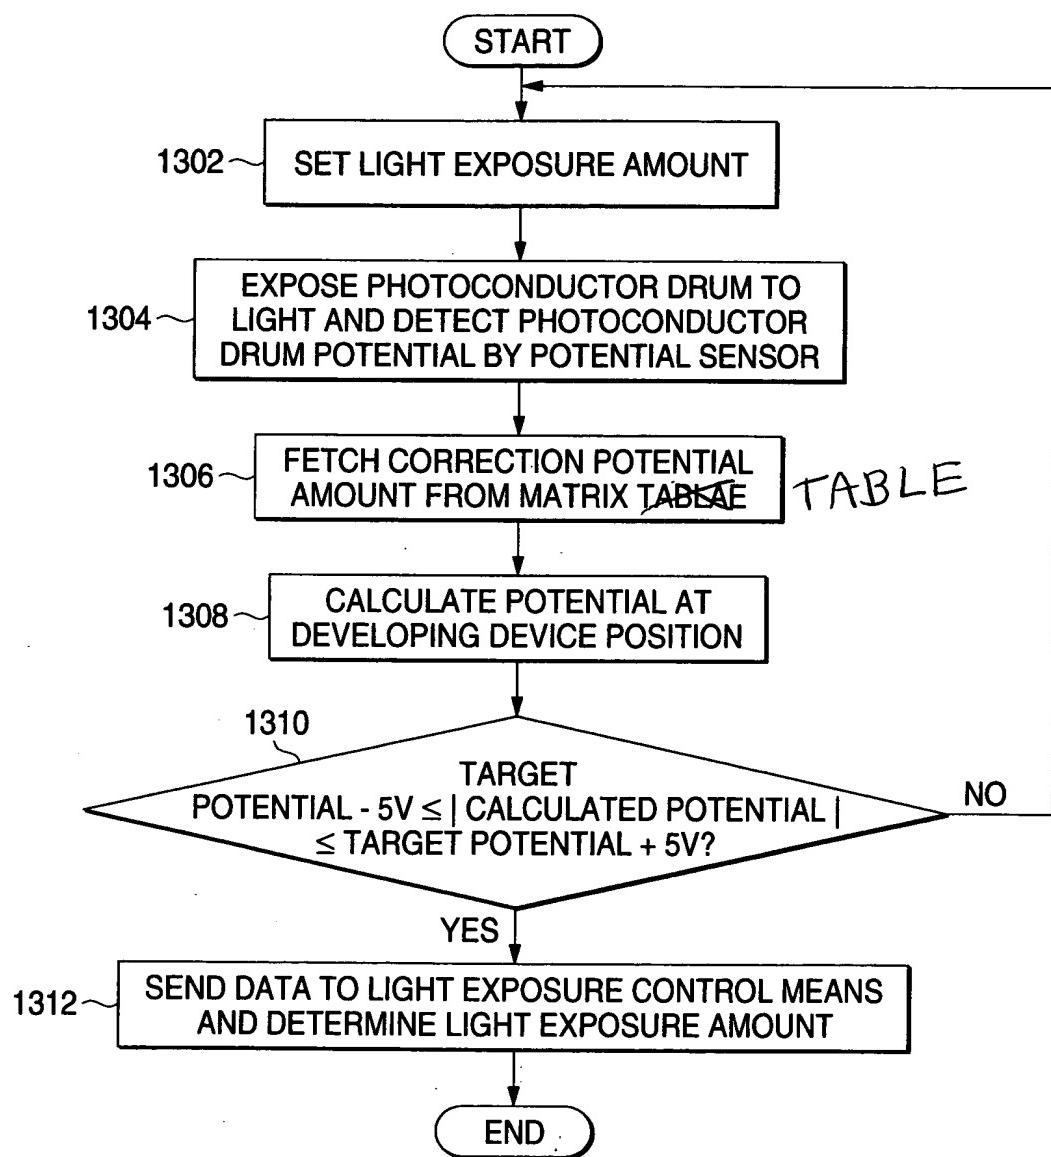

C I P E  
JAN 20 2004  
PATENT & TRADEMARK OFFICE LVI

10/12

FIG. 15

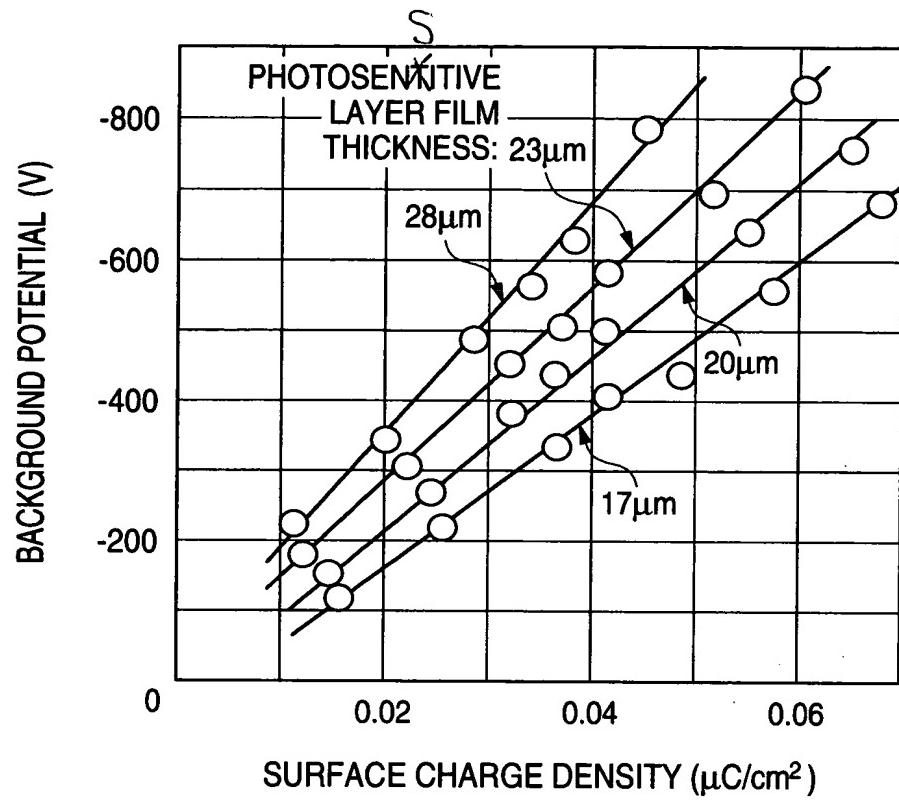


FIG. 16

